


FIRE RESISTANT LOOSE BUFFERED CABLES

Single Tube

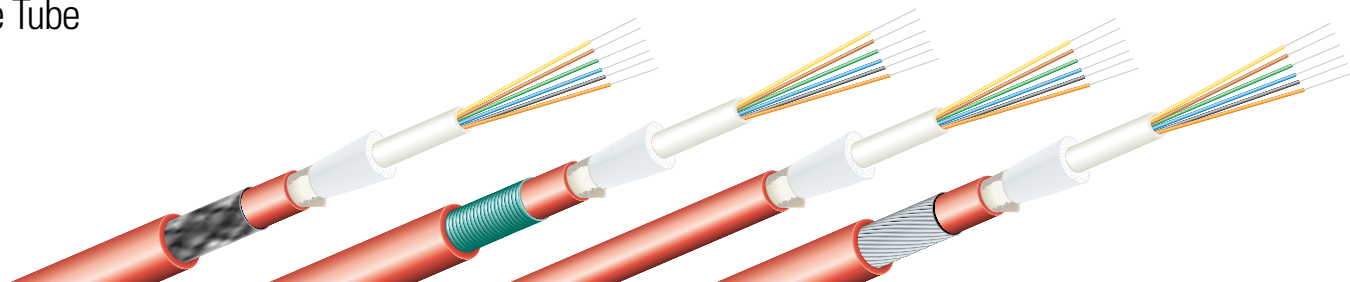

SLO-000-**-M1-A1-FR
SLO-000-**-M1-A3-FR
SLO-000-**-M1-A5-FR
SLO-000-**-M1-A7-FR

FEATURES & APPLICATIONS

- Safety Systems, Critical Connections and Fire Fighting Systems
- Indoor and outdoor installation
- Tunnels and closed areas in general

TEMPERATURE RANGE

-30/+70°C (operating)
-30/+70°C (storage)
-10/+60°C (installation)

MINIMUM BENDING RADIUS

20 times overall diameter (dynamic)
10 times overall diameter (static)

CABLE CONSTRUCTION

Fibres

Singlemode and multimode fibres, with loose technology coating.

Structure

The jelly filled tube containing the fibres is reinforced with glass yarns and is wound with a flame resistant tape.

Inner sheath

LSZH (M1) compound (only for A1, A3 and A7 armoured cables)

Armouring

A1 Galvanized steel wire braid
A3 Corrugated steel tape
A5 Anti-rodent glass yarns
A7 Steel wire armor

Outer sheath

LSZH (M1) compound

APPLICABLE STANDARDS

Optical fibre characteristics IEC 60793-1

Optical fibre cable characteristics IEC 60794-1

Fire resistant IEC 60331-25

Fire retardant IEC 60332-3 EN 50266

Flame retardant IEC 60332-1 EN 60332-1

Test on gases evolved during combustion IEC 60754 EN 50267-2

Low smoke emission IEC 61034-2 EN 50268-2

Type	Fibre (n°)	Tube Diameter (mm)	Diameter (mm)	Weight (kg/km)	Tension load (N)	Crush (N/100mm)
A1 METALLIC ARMoured						
SLO-000-**-M1-A1-FR	02 ÷ 12	2.7	11.5	160	1700	2000
SLO-000-**-M1-A1-FR	16 ÷ 24	3.5	12.0	180	1700	2000
A3 METALLIC ARMoured						
SLO-000-**-M1-A3-FR	02 ÷ 12	2.7	9.0	100	2000	2500
SLO-000-**-M1-A3-FR	16 ÷ 24	3.5	10.0	120	2000	2500
A5 DIELECTRIC ARMoured						
SLO-000-**-M1-A5-FR	02 ÷ 12	2.7	7.5	70	1500	1500
SLO-000-**-M1-A5-FR	16 ÷ 24	3.5	8.0	80	1500	1500
A7 METALLIC ARMoured						
SLO-000-**-M1-A7-FR	02 ÷ 12	2.7	10.5	180	2500	3000
SLO-000-**-M1-A7-FR	16 ÷ 24	3.5	11.0	210	2500	3000

approximate values