
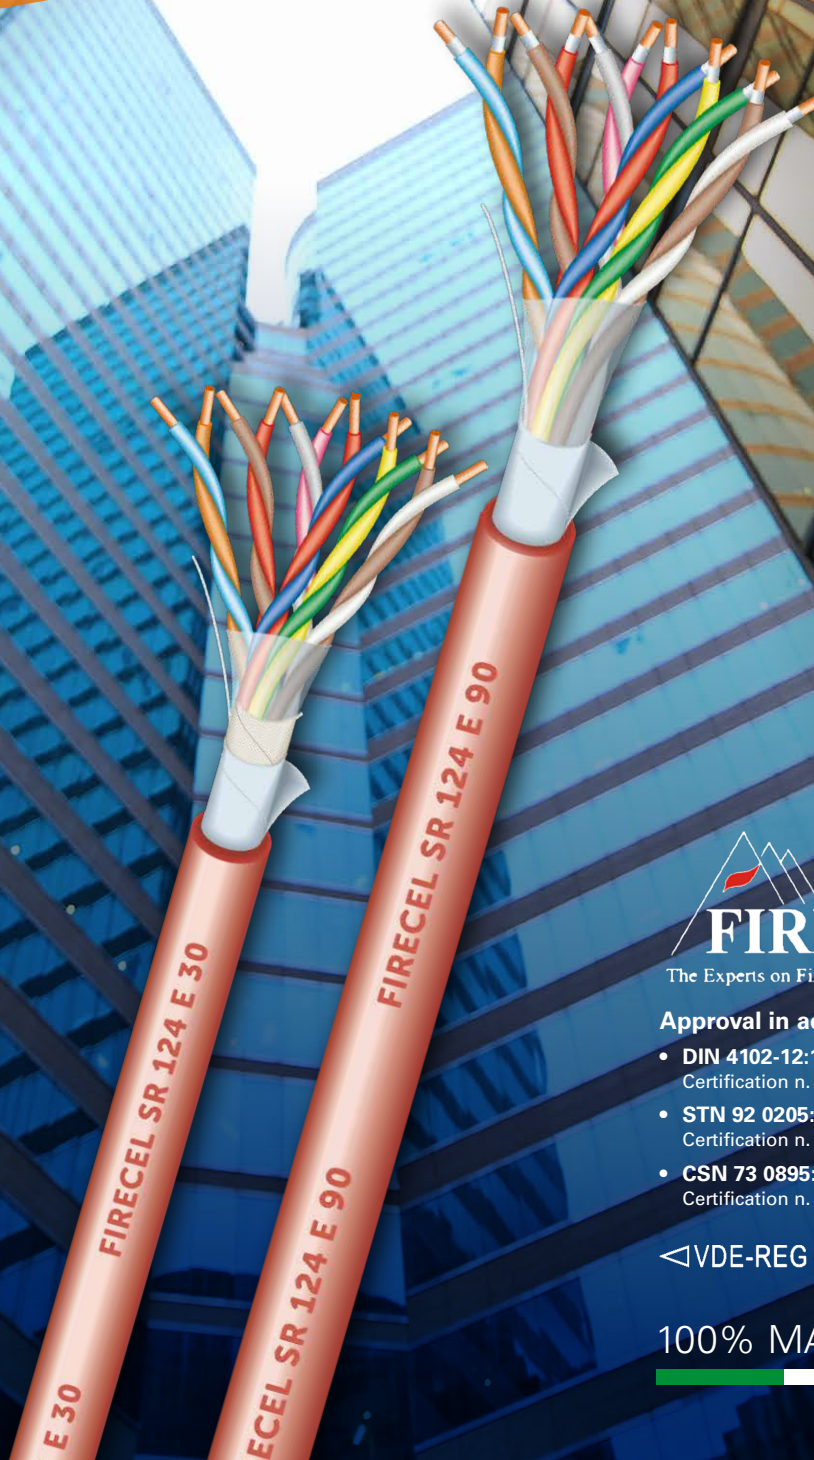


FIRECEL SR 124 E 30 / E 90

IN ACCORDANCE WITH
DIN 4102-12 AND DIN VDE 0815

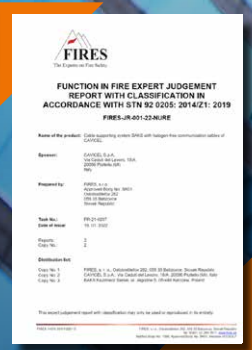

Approval in accordance with:

- DIN 4102-12:1998-11
Certification n. FIRES-JR-003-22-NURE
- STN 92 0205:2014/Z1:2019
Certification n. FIRES-JR-001-22-NURE
- CSN 73 0895:2016
Certification n. FIRES-JR-002-22-NURE

◁VDE-REG F370▷

100% MADE IN ITALY



FIRECEL SR 124 E 30 / E 90

Multipair Overall Screen/Silicone Insulation



JE-H(St)H...Bd - FE180/E30

JE-H(St)H...Bd - FE180/E90



◁VDE-REG F370▷

APPLICATIONS

Fire resistant communication cables suitable for indoor and outdoor installation, in dry and moistens areas.

These cables assure circuit integrity E30-E90 according to DIN 4102-12.

Operating voltage peak value: 225V.

OPERATING TEMPERATURE

Operating: -30/+70 °C

Installation: -5/+50 °C

MINIMUM BENDING RADIUS

7,5 times the outer diameter.

CABLE CONSTRUCTION

Conductors

Solid plain annealed copper. 0.8 mm

Insulation

Silicone rubber (E30 cables)

Silicone rubber + Mica tape (E90 cables)

Overall screen

Al/PET + PET + 0.8mm solid tinned annealed copper drain wire + glass tape (E30)

Al/PET + PET + 0.8mm solid tinned annealed copper drain wire (E90)

Outer sheath

LSZH thermoplastic material

APPLICABLE STANDARDS

Functional resistance in fire

DIN 4102-12

STN 92 0205

CSN 73 0895

Fire resistance

IEC 60331-23

Flame retardant

EN 60332-1-2 / IEC 60332-1-2

Fire retardant

DIN EN IEC 60332-3-24

VDE 0482-332-3-24

Halogen free properties

DIN EN 60754-2

VDE 0482-754-2

Low smoke emission

DIN EN 61034-2

VDE 0482-1034-2

Design

DIN VDE 0815

FE180 / E 30

N° of pairs x cross-section (mm ²)	Nominal diameter mm	Nominal Weight kg/km
1 x 2 x 0.8	6.4	60
2 x 2 x 0.8	7.1	70
4 x 2 x 0.8	11.4	150
8 x 2 x 0.8	12.5	210
12 x 2 x 0.8	15.1	310

FE180 / E 90

N° of pairs x cross-section (mm ²)	Nominal diameter mm	Nominal Weight kg/km
1 x 2 x 0.8	6.9	70
2 x 2 x 0.8	7.8	90
4 x 2 x 0.8	13.1	170
8 x 2 x 0.8	16.0	360
12 x 2 x 0.8	18.0	440

HEADQUARTER AND FACTORY

Via Caduti del Lavoro, 18/A 20090 Pioletto (Milano). Italy

Ph: +39 02 921 605 21

Fax: +39 02 921 607 53

e-mail: cavicel@cavicel.com

DUBAI OFFICE

Fortune Executive Tower. Office 406 - Plot n.T1 Jumeirah

Lakes Towers. Dubai - UAE

Ph: +971 4 4581199

Fax: +971 4 4581144

e-mail: middleeast@cavicel.com

HONG KONG OFFICE

2/F AXA Southside Building

38 Wong Chuk Hang Road. Hong Kong

Ph: +852 3963 9365

e-mail: apac@cavicel.com